
# Data Sheet | Item Number: 734-130

Coding key; to be snapped above top level; white

https://www.wago.com/734-130

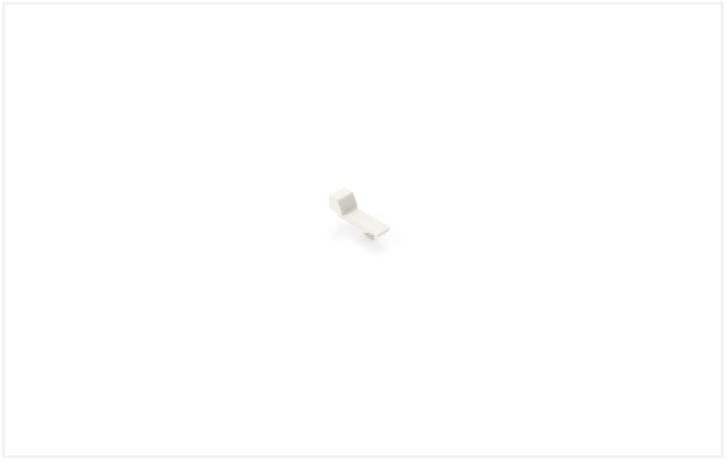

Color: white

## Mechanical data

| | |
|---|---|
| Suitable | for male connectors |

## Material data

| | |
|---|---|
| Note (material data) | Information on material specifications can be found here |
| Color | white |
| Material group | I |
| Insulation material (main housing) | Glass fiber-reinforced polyamide (PA66 GF) |
| Flammability class per UL94 | V0 |
| Fire load | 0.001 MJ |
| Weight | 0.1 g |

## Commercial data

| | |
|---|---|
| Product Group | 3 (Multi Conn. System) |
| PU (SPU) | 500 (100) pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4017332315708 |
| Customs tariff number | 39269097900 |

## Product Classification

| | |
|---|---|
| UNSPSC | 39121409 |
| eCl@ss 10.0 | 27-44-04-92 |
| eCl@ss 9.0 | 27-44-04-92 |
| ETIM 9.0 | EC002848 |
| ETIM 10.0 | EC002848 |
| ECCN | NO US CLASSIFICATION |

## Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant,No Exemption |

## Approvals / Certificates

### Approvals for marine applications

| Approval | Standard | Certificate Name |
|---|---|---|
| LR<br>Lloyds Register | IEC 61984 | 96/20035 (E5) |

## Downloads

### Environmental Product Compliance

**Compliance Search**

Environmental Product Compliance 734-130

## Documentation

**Additional Information**

| | | |
|---|---|---|
| Technical Section | 03.04.2019 | pdf<br>2027.26 KB |

## CAD/CAE-Data

**CAD data**


2D/3D Models 734-130

**CAE data**

ZUKEN Portal 734-130

## Installation Notes

### Coding



Coding a male header – fitting coding key(s). Black coding key(s) suitable for THR soldering process